Connecting the M14 directly to the drainpipe



15th April 2016

Marketing Department

mediclinics

Introduction

• In a hands-in hand dryer the wastewater after handwashing can be managed basically through three ways :

a) No water management mechanism featured. In this case the water drips to the ground making it slippery and increasing the risk of falls. **The poorest water management system**.

b) Collecting water in an inner tank within the hand dryer. Our Dualflow Plus, from its first steps, always has had a removable inner tank with an external valve for easy emptying. **Good water management system**.

c) Connecting the hand dryer water basin, where the water gets collected, directly to the main waste pipe of the restroom. **The best water management system**.



Connecting the Dualflow Plus to the drainpipe

• A new feature included in the Dualflow Plus is the option to connect it directly to the main waste pipe of the restroom to get rid of the wastewater after handwashing.



• With this new feature our Dualflow Plus is the first hand dryer in the market that incorporates the best method of water drainage.



• This connection is carried out thanks to a connection kit, code KITDESM14A, based on a flexible plastic tube and its own fixation mechanism to the hand dryer water basin outlet, that can be easy installed in all Dualflow Plus, already installed or not.

The new feature seen in pictures



Inner front view



Detail of the inner front view



Rear view

How to install the drainpipe connection kit?

mediclinics

1

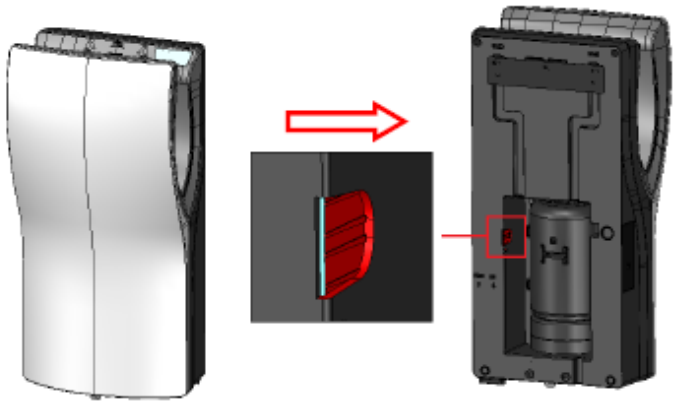

Break the flap on the rear side of the hand dryer base. Use a screwdriver and a hammer to do it more easily

2

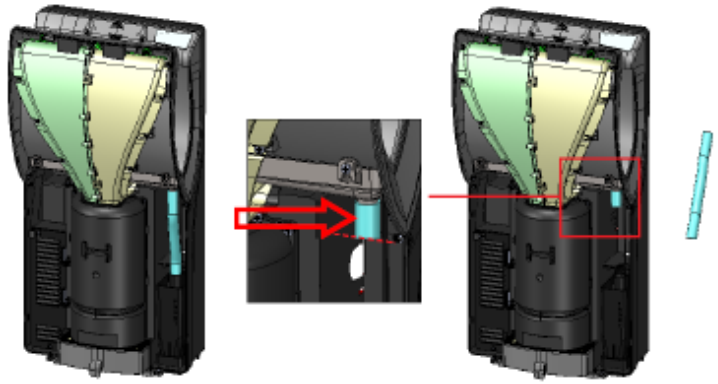

Disassemble the frontal cover and using a cutter cut the original drain tube that leads into the tank

3

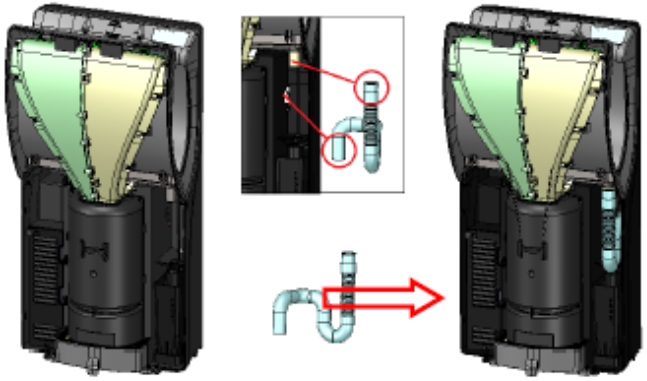

Introduce one end of the new tube through the new hole in the backside and fix the other side over the remaining part of the cut old tube using the provided flange

4

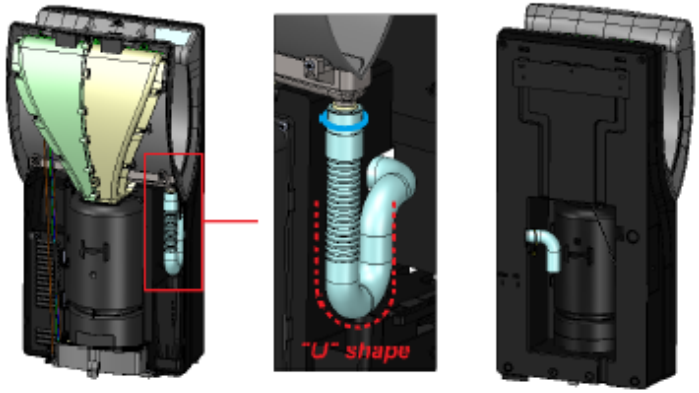

Confirm that the new tube maintains a "U" shape once assembled and connect the backside part of the tube to the waste pipe. Finally, assemble the frontal cover.

Benefits of connecting the dryer directly to the drainpipe

- No water dripping to the ground, hence no slippery floors.

- No need to empty the water tank for the water goes directly to the waste pipe.

- Maintenance savings since the water tank doesn´t have to be emptied.

- Odors caused by the accumulation of dirty water in the tank disappear because the water goes straight to the drainpipe.







